


PL 400 E TECHNICAL SPECIFICATIONS

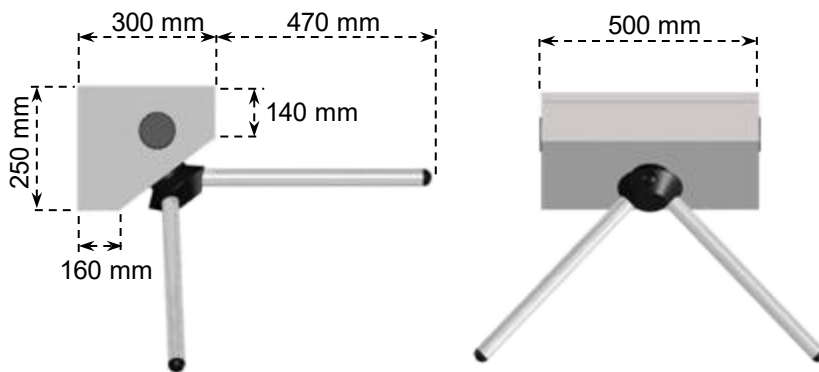

■ Power Requirements	: 110/220V. 60/50Hz. AC (%±10) 24V. DC at standby ~11W. max. ~60W.
■ Dimensions	: 500x250x300+Arm lenght (470mm)
■ Arms	: Single-sided. Ø40mmx2mm 304-Grade (Opt. 316-Grade) Stainless steel (Opt. anodised hard aluminium). Arms can be dismantled or mounted one by one separately.
■ Body Features	: 304-Grade (Opt. 316-Grade) Stainless steel with brushed (Opt. Satin) surface protected against water for outdoors use.
■ Indicator Features	: Green Arrow & Red Bar LED
■ Operating Temperature, Humidity, IP Rating	: -20°C to +68°C (Opt. -50°C with heater unit) / RH 95% non-condensing / IP 54 Outdoor Model (Opt. IP 56)
■ Control System	: All inputs are opto-coupler protected .Controlled by dry contact or grounding input. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
■ Operation	: Bi-directional passage, manually (Opt. Motorized) operated system.
■ Output Data	: The system provides dry contact passage feedback by relays.

■ Emergency Mode

: (Standard: Fail Safe); in case of power failure or emergency, the arms rotate freely to allow rapid passage (Opt. Fail Secure).

■ Flow Rate

: Capacity of Mechanism (Manual System): ~90 passages/minute
Nominal: ~25 - 46 passage-per-minute (Recommended reference figure)
❖ Explanatory Notes:
- The above given figures are approximate for one person per walkway or lane.
- The system allows the new passage authorisation in less than ~0, 3 seconds. After the passage authorization, the total passage time depends on the pushing and passage speed of the people.
- Utilisation of different access control units can change the flow rate.

■ Standard Features

: Direction and status indicators

■ Optional Accessory and Applications

: Remote control units, interface unit for PC, RS485, RS232 and LAN, counter, audio-messaging system, motor driven unit, automatic drop (retractable) arm, alarm sensor, heater positive unit, coin slot/intelligent coin system and coin box, card reader pole, pipe barrier (Separator), floor mounting plate.

**Design and specifications are subject to change without notice.*